


XNSPAS

Forged Screw Pin Bow Shackles

Part Code	Weight	WLL (T)	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	F (inch)	G (inch)	H (inch)	L (inch)	M (inch)
	(kg each)											
XNSPAS01	0.03	1/3	0.38	0.25	0.88	3/16	0.60	0.56	0.98	1.47	0.16	1.12
XNSPAS02	0.05	0.5	0.47	0.31	1.13	1/4	0.78	0.61	1.28	1.84	0.19	1.38
XNSPAS03	0.08	0.75	0.53	0.38	1.22	5/16	0.84	0.75	1.47	2.09	0.22	1.66
XNSPAS04	0.14	1	0.66	0.44	1.44	3/8	1.03	0.91	1.78	2.49	0.25	2.03
XNSPAS05	0.20	1.5	0.75	0.50	1.69	7/16	1.16	1.06	2.03	2.91	0.31	2.38
XNSPAS06	0.32	2	0.81	0.63	1.88	1/2	1.31	1.19	2.31	3.28	0.38	2.69
XNSPAS07	0.62	3.25	1.06	0.75	2.38	5/8	1.69	1.50	2.94	4.19	0.44	3.34
XNSPAS08	1.03	4.75	1.25	0.88	2.81	3/4	2.00	1.81	3.50	4.97	0.50	3.97
XNSPAS09	1.66	6.5	1.44	1.00	3.31	7/8	2.28	2.09	4.03	5.83	0.50	4.50
XNSPAS10	2.31	8.5	1.69	1.13	3.75	1	2.69	2.38	4.69	6.56	0.56	5.07
XNSPAS11	3.42	9.5	1.81	1.25	4.25	1-1/8	2.91	2.69	5.16	7.47	0.63	5.59
XNSPAS12	4.56	12	2.03	1.38	4.69	1-1/4	3.25	3.00	5.75	8.25	0.69	6.16
XNSPAS13	6.35	13.5	2.25	1.50	5.25	1-3/8	3.63	3.31	6.38	9.16	0.75	6.84
XNSPAS14	8.15	17	2.38	1.63	5.75	1-1/2	3.88	3.63	6.88	10.00	0.81	7.35
XNSPAS15	14.70	25	2.88	2.00	7.00	1-3/4	5.00	4.19	8.86	12.34	1.00	9.08
XNSPAS16	20.41	35	3.25	2.25	7.75	2	5.75	4.81	9.97	13.68	1.22	10.34
XNSPAS17	39.00	55	4.13	2.75	10.50	2-1/2	7.25	5.69	12.87	17.84	1.38	13.00
XNSPAS18	60.00	85	5.00	3.30	13.00	3	7.88	6.50	16.42	21.50	1.54	15.66

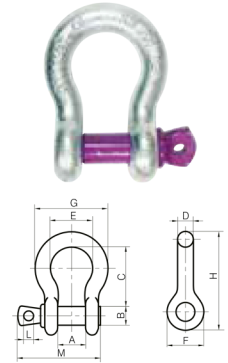


- US Federal Specification Hot Dipped Galvanised
- Safety Factor: 6:1
- Drop Forged

XNSPDS

Forged Screw Pin 'D' Shackles

Part Code	Weight	WLL (T)	A (inch)	B (inch)	D (inch)	E (inch)	F (inch)	G (inch)	K (inch)	L (inch)	M (inch)
	(kg each)										
XNSPDS01	0.03	1/3	0.38	0.25	3/16	0.79	0.56	0.72	1.22	0.16	1.07
XNSPDS02	0.05	0.5	0.47	0.31	1/4	0.97	0.62	0.97	1.59	0.19	1.43
XNSPDS03	0.07	0.75	0.53	0.38	5/16	1.15	0.75	1.07	1.91	0.22	1.71
XNSPDS04	0.13	1	0.66	0.44	3/8	1.42	0.92	1.28	2.31	0.25	2.02
XNSPDS05	0.19	1.5	0.75	0.50	7/16	1.63	1.06	1.48	2.67	0.31	2.37
XNSPDS06	0.28	2	0.81	0.63	1/2	1.81	1.18	1.66	3.03	0.38	2.69
XNSPDS07	0.54	3.25	1.06	0.75	5/8	2.32	1.50	2.04	3.76	0.44	3.34
XNSPDS08	0.92	4.75	1.25	0.88	3/4	2.75	1.81	2.40	4.53	0.50	3.97
XNSPDS09	1.41	6.5	1.44	1.00	7/8	3.20	2.10	2.86	5.33	0.50	4.50
XNSPDS10	2.14	8.5	1.69	1.13	1	3.69	2.38	3.24	5.94	0.56	5.13
XNSPDS11	3.06	9.5	1.81	1.25	1-1/8	4.07	2.69	3.61	6.78	0.63	5.71
XNSPDS12	4.30	12	2.03	1.38	1-1/4	4.53	3.00	3.97	7.50	0.69	6.25
XNSPDS13	5.65	13.5	2.25	1.50	1-3/8	5.01	3.31	4.43	8.28	0.75	6.83
XNSPDS14	7.20	17	2.38	1.63	1-1/2	5.38	3.62	4.84	9.05	0.81	7.33
XNSPDS15	12.15	25	2.88	2.00	1-3/4	6.38	4.19	5.78	10.97	1.00	9.06
XNSPDS16	19.19	35	3.25	2.25	2	7.25	5.00	6.77	12.74	1.22	10.35
XNSPDS17	33.00	55	4.13	2.75	2-1/2	9.38	5.68	8.07	14.85	1.38	13.00
XNSPDS18	50.00	85	5.00	3.30	3	11.00	6.50	8.56	16.87	1.54	15.66

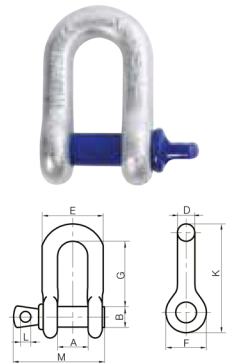

- US Federal Specification Hot Dipped Galvanised
- Safety Factor: 6:1
- Drop Forged