


## Shackles

Email: enquiries@cwssales.uk

## XNSBAS

## Forged Safety Pin Bow Shackles

Part Code	Weight (kg each)	WLL (T)	A (inch)	B (inch)	C (inch)	D (inch)	E (inch)	F (inch)	H (inch)	L (inch)
XNSBAS01	0.03	1/3	0.38	0.25	0.88	3/16	0.60	0.56	1.47	0.98
XNSBAS02	0.05	0.5	0.47	0.31	1.13	1/4	0.78	0.61	1.84	1.28
XNSBAS03	0.09	0.75	0.53	0.38	1.22	5/16	0.84	0.75	2.09	1.47
XNSBAS04	0.17	1	0.66	0.44	1.44	3/8	1.03	0.91	2.49	1.78
XNSBAS05	0.22	1.5	0.75	0.50	1.69	7/16	1.16	1.06	2.91	2.03
XNSBAS06	0.36	2	0.81	0.64	1.88	1/2	1.31	1.19	3.28	2.31
XNSBAS07	0.72	3.25	1.06	0.77	2.38	5/8	1.69	1.50	4.19	2.94
XNSBAS08	1.14	4.75	1.25	0.89	2.81	3/4	2.00	1.81	4.97	3.50
XNSBAS09	1.77	6.5	1.44	1.02	3.31	7/8	2.28	2.09	5.83	4.03
XNSBAS10	2.57	8.5	1.69	1.15	3.75	1	2.69	2.38	6.56	4.69
XNSBAS11	3.74	9.5	1.81	1.25	4.25	1-1/8	2.91	2.69	7.47	5.16
XNSBAS12	4.76	12	2.03	1.40	4.69	1-1/4	3.25	3.00	8.25	5.75
XNSBAS13	6.90	13.5	2.25	1.53	5.25	1-3/8	3.63	3.31	9.16	6.38
XNSBAS14	8.70	17	2.38	1.66	5.75	1-1/2	3.88	3.63	10.00	6.88
XNSBAS15	15.60	25	2.88	2.04	7.00	1-3/4	5.00	4.19	12.34	8.86
XNSBAS16	23.70	35	3.25	2.30	7.75	2	5.75	4.81	13.68	9.97
XNSBAS17	42.50	55	4.13	2.80	10.50	2-1/2	7.25	5.69	17.84	12.87
XNSBAS18	66.00	85	5.00	3.30	13.00	3	7.88	6.50	21.50	16.42

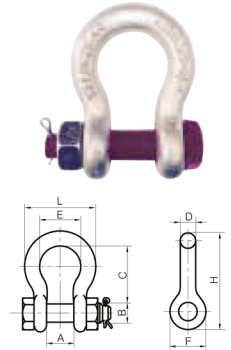


- US Federal Specification Hot Dipped Galvanised
- Safety Factor: 6:1
- Drop Forged

## XNSBDS

## Forged Safety Pin 'D' Shackles

Part Code	Weight (kg each)	WLL (T)	A (inch)	B (inch)	D (inch)	F (inch)	G (inch)	K (inch)	M (inch)	P (inch)
XNSBDS01	0.03	1/3	0.38	0.25	3/16	0.56	0.72	1.22	0.79	1.20
XNSBDS02	0.05	0.5	0.47	0.31	1/4	0.62	0.97	1.59	0.97	1.56
XNSBDS03	0.09	0.75	0.53	0.38	5/16	0.75	1.07	1.91	1.15	1.82
XNSBDS04	0.14	1	0.66	0.44	3/8	0.92	1.28	2.31	1.42	2.17
XNSBDS05	0.22	1.5	0.75	0.50	7/16	1.06	1.48	2.67	1.63	2.52
XNSBDS06	0.33	2	0.81	0.64	1/2	1.18	1.66	3.03	1.81	2.80
XNSBDS07	0.64	3.25	1.06	0.77	5/8	1.50	2.04	3.76	2.32	3.56
XNSBDS08	1.02	4.75	1.25	0.89	3/4	1.81	2.40	4.53	2.75	4.15
XNSBDS09	1.64	6.5	1.44	1.02	7/8	2.10	2.86	5.33	3.20	4.82
XNSBDS10	2.38	8.5	1.69	1.15	1	2.38	3.24	5.94	3.69	5.39
XNSBDS11	3.34	9.5	1.81	1.25	1-1/8	2.69	3.61	6.78	4.07	5.90
XNSBDS12	4.50	12	2.03	1.40	1-1/4	3.00	3.97	7.50	4.53	6.69
XNSBDS13	6.60	13.5	2.25	1.53	1-3/8	3.31	4.43	8.28	5.01	7.21
XNSBDS14	7.80	17	2.38	1.66	1-1/2	3.62	4.87	9.05	5.38	7.73
XNSBDS15	13.00	25	2.88	2.04	1-3/4	4.19	5.82	10.97	6.38	9.33
XNSBDS16	21.20	35	3.25	2.30	2	5.00	6.82	12.74	7.25	10.41
XNSBDS17	38.50	55	4.13	2.80	2-1/2	5.68	8.07	14.85	9.38	13.58
XNSBDS18	56.00	85	5.00	3.25	3	6.50	8.56	16.87	11.00	15.13

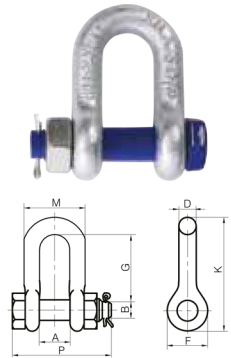

- US Federal Specification Hot Dipped Galvanised
- Safety Factor: 6:1
- Drop Forged