
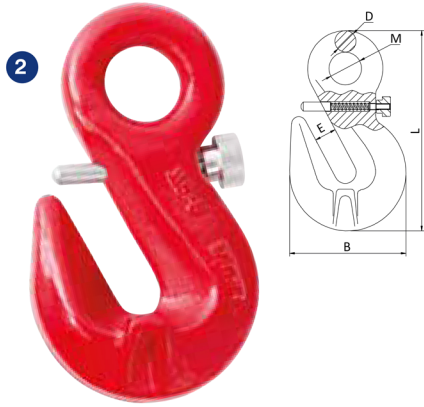


# Grade 8 Components

Email: [enquiries@cwssales.uk](mailto:enquiries@cwssales.uk)

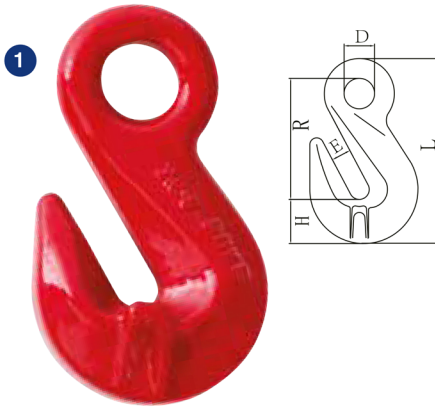

## 1. XN085 Eye Shortening Grab Hook

Part Code	Size (mm)	Weight (kg)	WLL (T)	E	D	H	R	L
XN085-06	6	0.21	1.12	8	14.5	18	46.8	73
XN085-07/8	7/8	0.35	2	10.8	18	21.5	52.5	93
XN085-10	10	0.65	3.15	13	20.5	29	79.8	122
XN085-13	13	1.34	5.3	16.5	26	42.8	99.7	158
XN085-16	16	2.1	8	19	30.5	44.5	106.5	169
XN085-20	18/20	4	12.8	24	37.5	56	140.2	219
XN085-22	22	6.36	16	28	44	68	165	259
XN085-26	26	10.6	21.2	30	49	77	197	306
XN085-32	32	19.4	31.5	38	57	95	226	361

- EN1677-1.
- Safety Factor 4:1

## 2. XN317 Eye Shortening Grab Hook with Safety Pin

Part Code	Size (mm)	Weight (kg)	WLL (T)	M	B	D	E	L
XN317-07/8	7/8	0.29	2	17	50	9.5	11	88.5
XN317-10	10	0.75	3.15	20	71	13	13	121.5
XN317-13	13	1.62	5.3	26	96	15.5	16.5	158

- EN1677-1.
- Safety Factor 4:1

- Fatigue Rated x 1.5 WLL for 20,000 cycles
- 100% Magnaflux Crack Detected
- Proof Tested - 2.5 times Working Load Limit
- Super Alloy Steel