
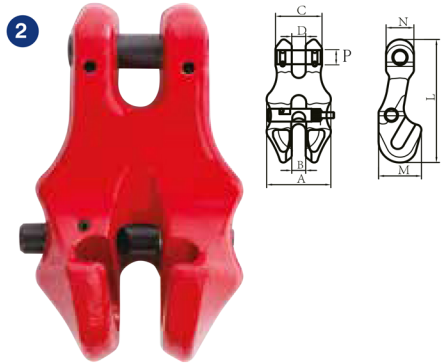


Grade 8 Components

Email: enquiries@cwssales.uk

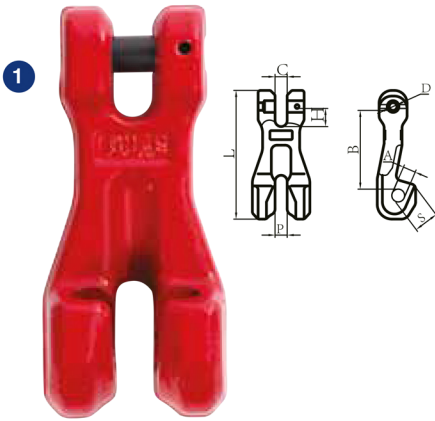

1. XN073 Clevis Shortening Clutch

Part Code	Size (mm)	Weight (kg)	WLL (T)	P	C	A	B	H	S	L	D
XN073-06	6	0.17	1.12	7.5	7.5	8	44	10.3	12	73.5	7.8
XN073-07/8	7/8	0.37	2	9.5	9.5	10.5	61.7	14	17	101	9.2
XN073-10	10	0.97	3.15	13	13	12.4	92	18.4	28	138	13.2
XN073-13	13	2.01	5.3	16.5	16.5	16	115	22.7	34.5	177	16.2
XN073-16	16	3.32	8	21	21	19.5	143	28.5	40	220	20
XN073-20	18/20	6.2	12.5	23.5	23.5	23	152	33.6	46	238	24.3
XN073-22	22	8.5	15	25.5	25.5	26	195	39	57.5	295	28.1

- EN1677-1.
- Safety Factor 4:1

2. XN638 Clevis Shortening Clutch with Safety Pin

Part Code	Size (mm)	Weight (kg)	WLL (T)	A	B	C	D	M	N	P	L
XN638-07/8	7/8	0.41	2	50	9.5	33	9.5	33	23	9.2	92
XN638-10	10	0.75	3.15	60	11.5	43	11.5	42.2	26	13.3	115
XN638-13	13	1.67	5.3	79	15	55	15	54	34	16.3	149

- EN1677-1.
- Safety Factor 4:1

- Fatigue Rated x 1.5 WLL for 20,000 cycles
- Super Alloy Steel
- Proof Tested - 2.5 times Working Load Limit
- All Load Pins are 100% individually inspected and tested
- 100% Magnaflux Crack Detected